

5.8 inch Electronic Label Series



ET0580

Dalian Good Display Co., Ltd.



REV	DESCRIPTION	RELEASE DATE	EDITOR
3.0	Preliminary Release	2024/3/1	Zhanghui



Contents

1.	General Description	.4
2.	Feature	.4
3.	Specification	. 5
4.	Network Structure	.7
5.	Why choose us	. 8

🔄 GooDisplay

1. General Description

Good Display is dedicated to driving the adoption of e-paper technology, utilizing its low power consumption and reusability to minimize environmental impact while boosting productivity.

Good Display electronic shelf labeling (ESL) solution streamlines operations with automated price updates, offering a cost-effective alternative to paper. It enhances the customer experience by delivering precise and consistent pricing.

Good Display empowers retailers to achieve peak performance with its ESL platform and API integration. This future-ready digital infrastructure accelerates in-store transformation, enabling seamless price management, operational efficiency, personalization, and predictive analytics.

ET0580 series ESL tags with 648×480 high definition displays can be adapted to any sales scenarios . It supports text, promotion , QR code or barcode and can be reused with no paper required . It can be used for different application , such as other kind of logistics, warehouse and smart home management.

2. Feature

- Various color modes(Tri-color & Four color) are available.
- Cloud (MQTT) or local Server based options.
- You can manage price tags directly via Bluetooth using only a mobile app, without the need for a Gateway.
- Gateway is equipped with a built-in management system, it can operate independently without a server. (Optional)



3. Specification

3.1 Product Type (ET0580-88)



Gateway Ver. P/N	Display Color	Feature	Mobile APP Ver. P/N
ET0580-88	Red, Yellow, Black and White	Four Color	
ET0580-4F	Red, Black and White	Three Color	ET0580-4FB

3.2 Technical Features

Outline Dimension	133.1mm(H)×113.0mm(V)×9.0mm(D)
Operating temperature	0°C~40°C
Operating humidity	45%~70%RH
Protection rating	IP65(Default) IP68(Optional)
LED	Red, Green, Blue, three primary colors, Support 7 colors
Image Update	Over 30000 pcs labels / hour (500 pcs/ min)
Wireless Connectivity	BLE5.0 Private Protocol
Communication Band	2.400-2.480 GHz, Maximum EIRP ≤ 10mW
Communication Distance	Within 30 meters (50 meters in open areas)
Communication Mode	Gateway or Smart Phone APP
Weight	135 g
Packaging Information	80pcs/Box, 11.8 Kg, 400mm×295mm×310mm

🕒 GooDisplay

3.3 E Paper Display

Size	5.8 inch
Resolution	648(H)×480(V)
DPI	138
Active Area	118.78mm(H)×88.22mm(V)
View Angle	>170°
Shell Color	White/Black
Screen Display Color	Black, White and Red;
	Black, White, Red and Yellow

3.4 Battery

Batteries	CR2430 x 6
Battery Lifetime	Up to 7 years (Industry Leader)


3.5 Features

NFC	Yes (Optional)
Wireless Firmware Update	Yes
Usable Pages	8 Pages
Compliance	CE, RoHS, FCC, MIC, SRRC

3.6 Function


No.	ltem	Description
1	Data display	Support the transmission and display of other contents such as text, pictures, symbols and so on in any language.
2	NFC communication	Support NFC communication function. (Optional)
3	Temperature Detection	Each tag supports temperature sampling, and the system can be read.
4	Electric quantity Detection	Each tag supports the power sampling function, which can be read by the system.
5	LED light flicker setting	Support LED 3 color independent control lights. Each light flashing frequency is 1 time per second. The flashing times of each lamp can be set by the user.

4. Drawing (unit:mm)

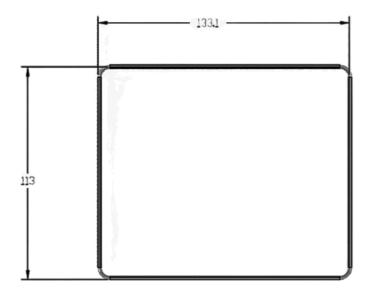



5. Network structure

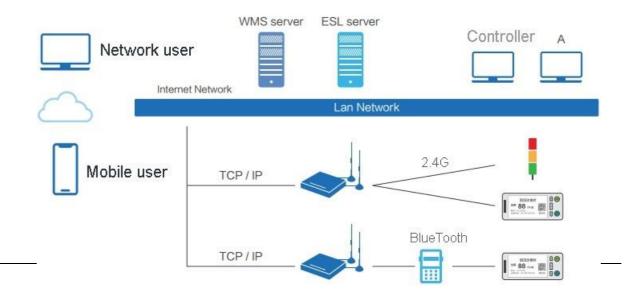

6. Why choose us

