



Customer:	Customer NO.:	Customer Approve By:	REV.	DESCRIPTION OF MODIFY	MODIFY BY	DATE
			A0	1'ST,DESIGN		30-May-2018
			A1			
			A2			

Capacitive Touch USB Driving Board

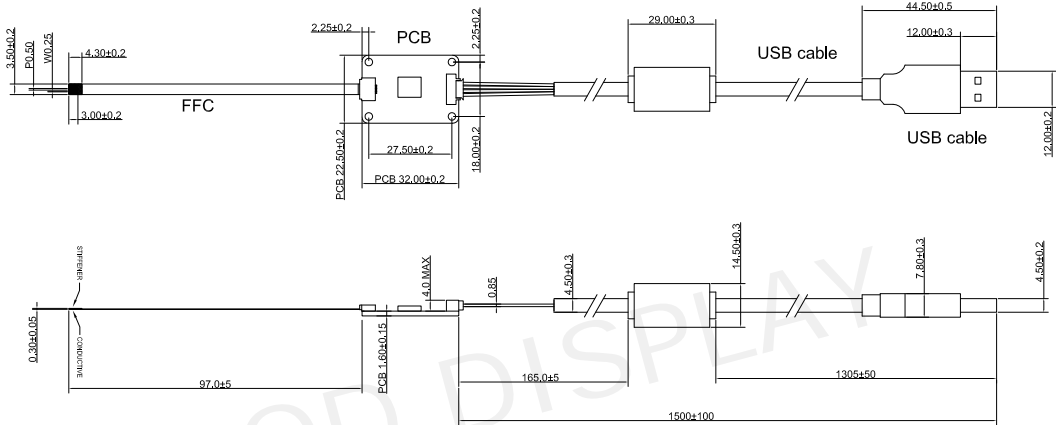

Capacitive Touch Screen

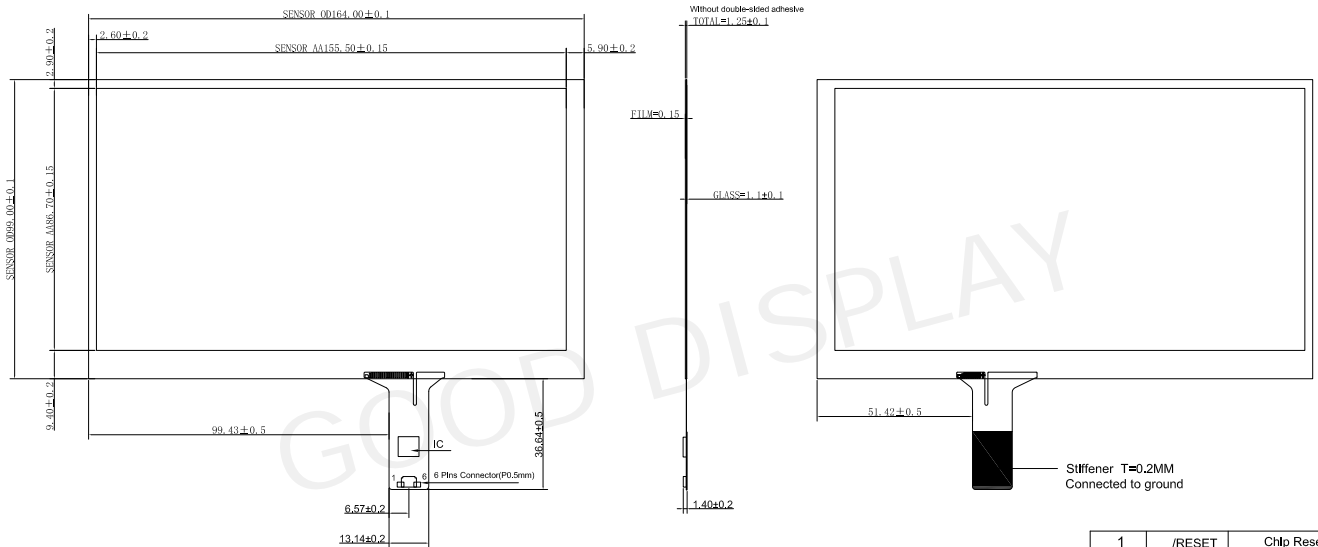

NOTE:

- G+FLIM
ITO GALSS:1.1MM
Explosion-Proof Membrane:0.15MM
- IC: GT911+USB DRIVE BOARD
- OPERATING VOLTAGE: 2.8-3.3V
- TRANSMITTANCE: >= 80%
- SURFACE HARDNESS: 3H
- OPERATING TEMP: -20 ~ +70°C ≤90%RH
- STORAGE TEMP: -30 ~ +80°C ≤90%RH

1	/RESET	Chip Reset
2	VDD	Supply Voltage
3	GND	Ground Connection
4	/INT	Interrupt Signal
5	SDA	I2C Data Line
6	SCL	I2C Clock Line

UNIT: MM		SIZE: A4	
SHEET: 1 OF 1			
LCM PART NUMBER: GDTE070-8-USB			REV: A0
DRAWN BY :	CHECKED BY :	APPROVED BY :	